
ARIES
IMEX
TRADING
INC.



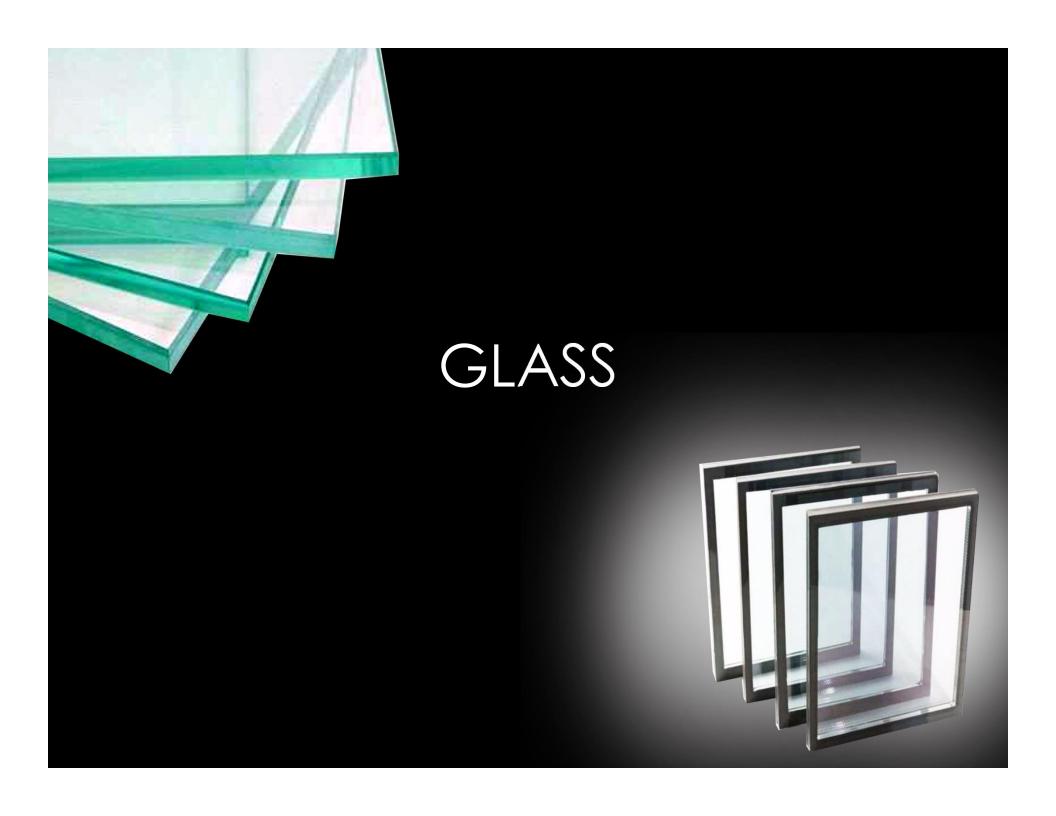


TEMPERED GLASS

APPLICATION

Tempered glass is widely used for buildings such as facades, curtain walls, railings, balustrades, escalators, doors, office partitions, table, etc.



Product Name	Tempered Glass
Thickness	3mm, 4mm, 5mm, 6mm, 8mm, 10mm, 12mm, 15mm,19mm
Shape	Flat or Curved
Style	Hole, notched, polished edge
Size (minimum)	200mm x 200mm
Size (maximum)	2400mm x 6000mm
Color	clear, white, gray, blue, green, pink
Quality Standard	GB 15763.3 (Chinese Standard), EN 12543 (European Standard), EN 12600 (European Standard), ANSI Z97.1 (American Standard), AS/NZS 2208 (Australian Standard)

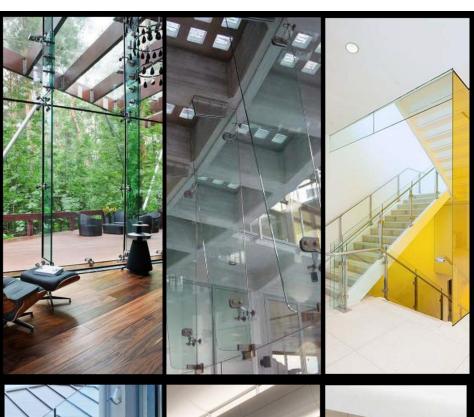



LAMINATED GLASS

APPLICATION

Windows and doors, skylight, railings, balcony, floor canopy, glass partitions, pool fence, long corridor, etc.






Product Name	Laminated Glass
Thickness	3+0.38+3mm, 5+0.76+5mm, 6+0.76+6mm, 6+1.14+6mm, 8+1.52+8mm, 10+1.52+10mm, etc.
Interlayer Film Thk (PVB & EVA)	0.38mm, 0.76mm, 1.14mm, 1.52mm, 2.28mm, etc.
Size (minimum)	100mm x 100mm
Size (maximum)	2400mm x 12000mm
Color	clear, white, gray, blue, green, pink
Quality Standard	GB 15763.3 (Chinese Standard), EN 12543 (European Standard), ANSI Z97.1 (American Standard), AS/NZS 2208 (Australian Standard)












INSULATED GLASS


APPLICATION

Insulated glass as a kind of energy-saving glass, it is widely used for facades, curtain walls, skylights, green house, windows, doors, office partitions, etc.





Product Name	Insulated Glass
Thickness	5+9A+5, 6+12A+6, 6+16A+6, 8+12A+8, 8+16A+8, etc.
Air/Argon space	4A, 6A, 9A, 12A, 15A, 16A
Size (minimum)	300mm x 300mm
Size (maximum)	2400mm x 6200mm
Color	clear, white, gray, blue, green, pink
Quality Standard	GB/T 11944 (Chinese Standard), EN 1279 (European Standard), ASTM 2190 (American Standard)












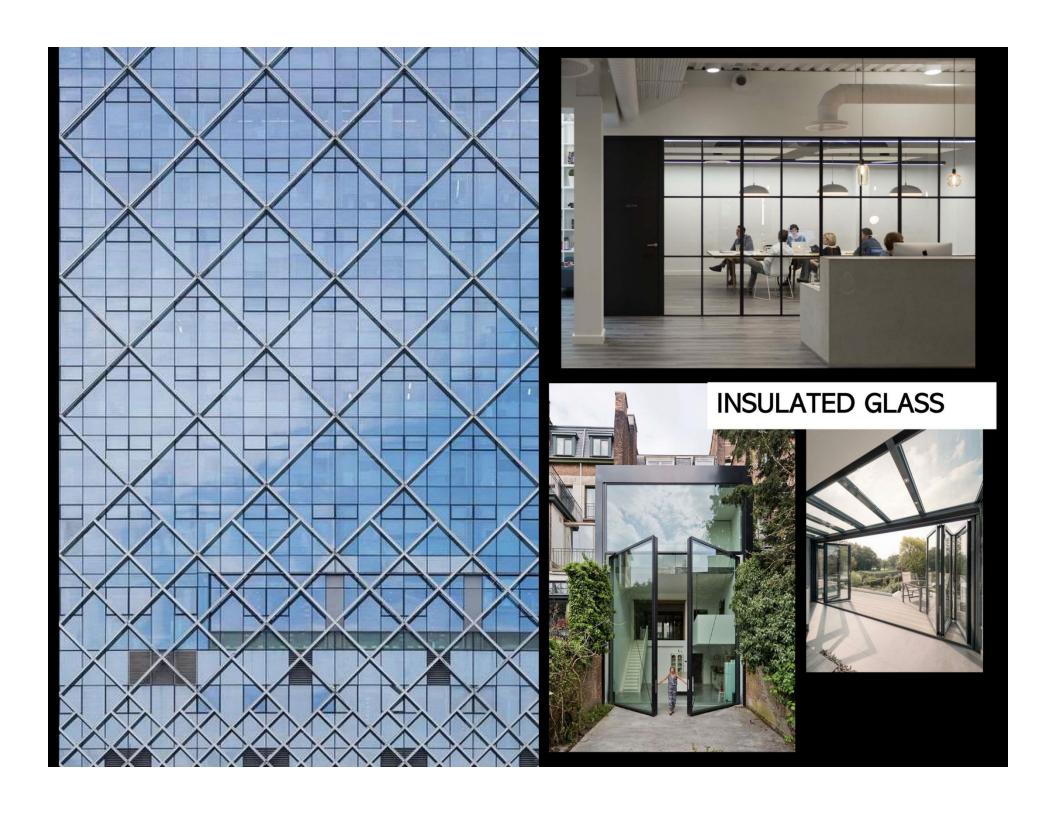

BULLETPROOF GLASS

APPLICATION

Windows and doors. bank, interior & exterior, glazing hospital, shopping mall, etc.





Product Name	Bulletproof Glass
Thickness	8+1.52+8+1.52+8mm, 10+1.52+10+1.52+10mm, etc.
PVB Thickness	0.38mm, 0.76mm, 1.14mm, 1.52mm, 2.28mm, 3.04mm
Size (minimum)	300mm x 300mm
Size (maximum)	1830mm x 2400mm
Color	clear, white, gray, blue, green, pink
Quality Standard	GB/T 11944 (Chinese Standard), EN 1279 (European Standard), ASTM 2190 (American Standard)








FIREPROOF GLASS

APPLICATION

Entrance doors, windows, curtain walls for residential & commercial buildings, glass partitions, safe exits, interior and exterior glazing . cinema, bank, hospita;\l, shopping malls, etc.

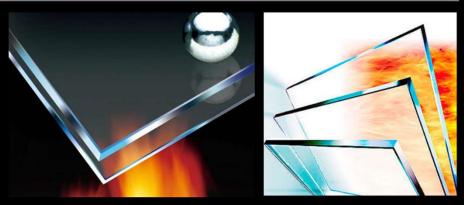

Product Name	Fireproof Glass
Thickness	4+0.76+4+0.76+6+0.76+10mm, 4+0.76+6+0.76+8+0.76+10+0.76+8mm
Size (minimum)	300mm x 300mm
Size (maximum)	1830mm x 2400mm
Color	clear, white, gray, blue, green, pink
Shape	Flat and Curved/Bent
Туре	Laminated Fire Proof Glass, Cut-able Fire Proof Glass, Uncut-able Fire Proof Glass, etc.
Quality Standard	GB/T 11944 (Chinese Standard), EN 1279 (European Standard), ASTM 2190 (American Standard)






SILVER MIRROR

APPLICATION

Mirror is used in bathroom, furniture, doors, glass walls, commercial shelves or public areas.





Product Name	Silver Mirror
Туре	Clear silver mirror, Glass mirror with ISO
Thickness	2mm - 10mm
Size (minimum)	300mm x 300mm
Size (maximum)	3660mm x 2400mm
Color	clear, euro grey, euro bronze, golden bronze, f green, pink, etc.
Advantage	High reflection and imaging effect
Quality Standard	JCT511 (Chinese Standard), EN 572.5 (European Standard)





