




ARIES
IMEX
TRADING
INC.



METAL SCREEN
HOLE & MESH

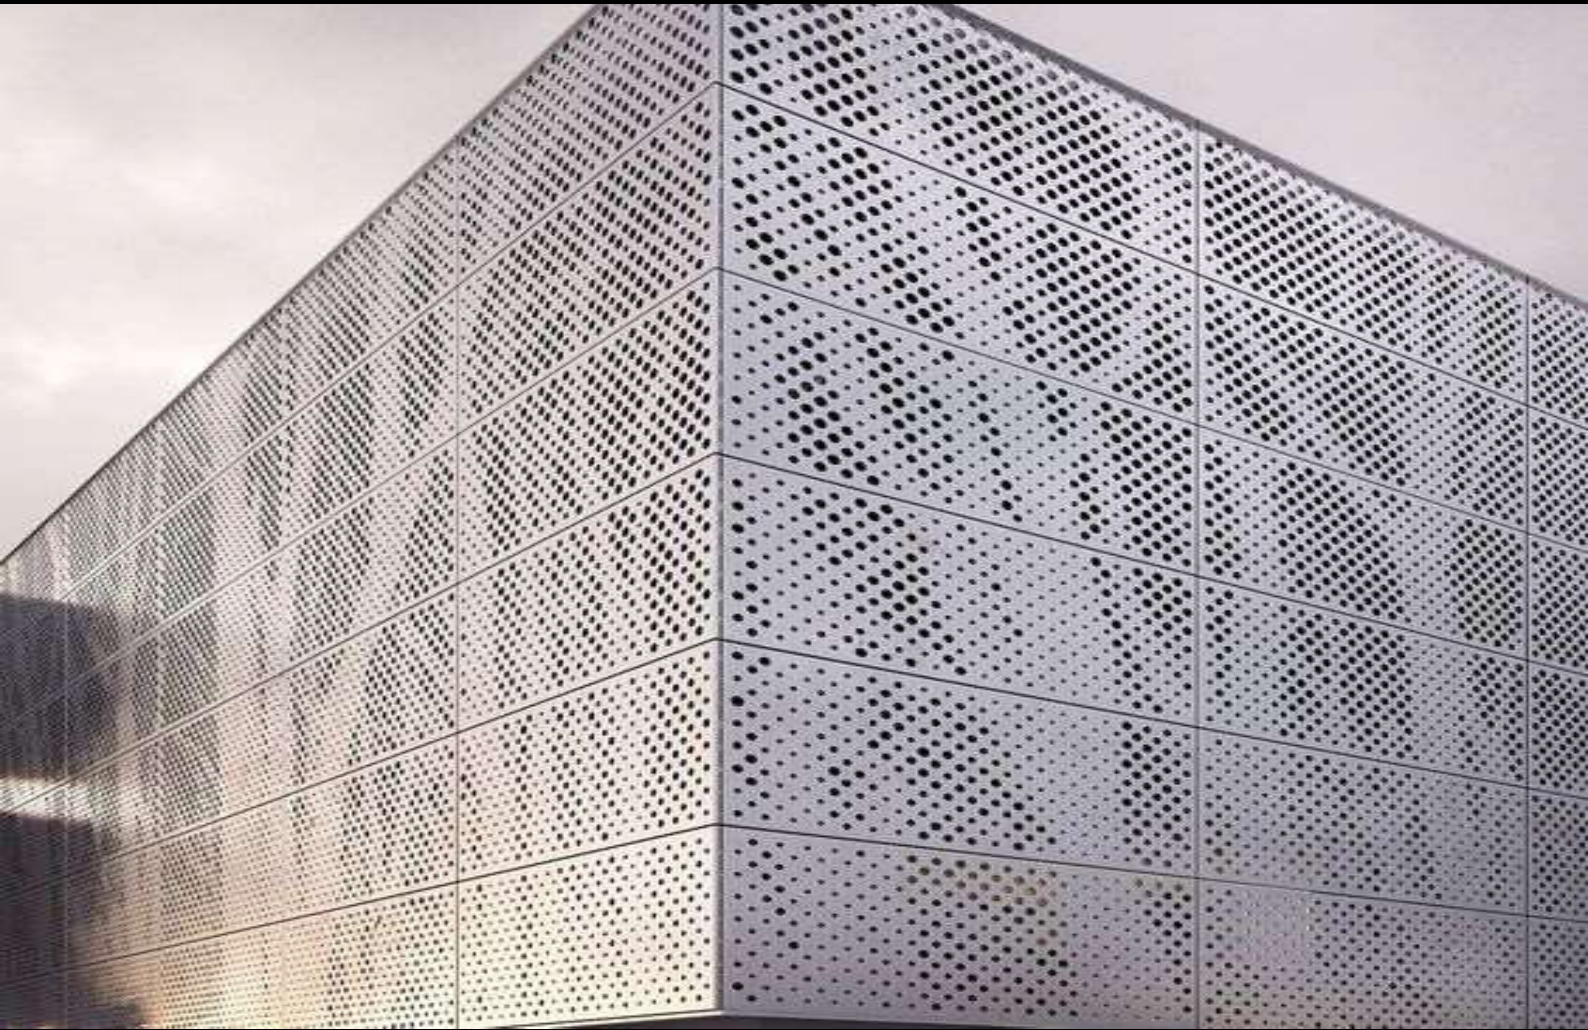

CHOOSE OUR STRENGTH



01

HIGH GRADE

It is made of durable, high temperature resistant material.

02

CUSTOMIZATION

We accept customers to map custom, all for customer satisfaction.



03

ELEGANT

It can harmonize with the surrounding scenery and make people visually comfortable.







NA-37




NA-38

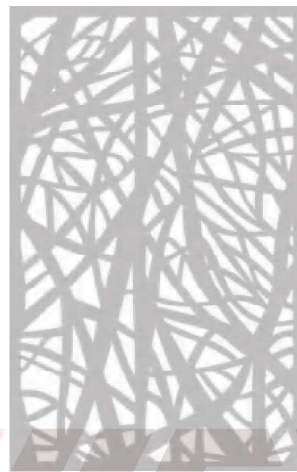


NA-39

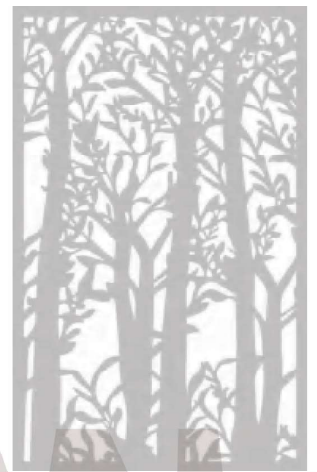


NA-40

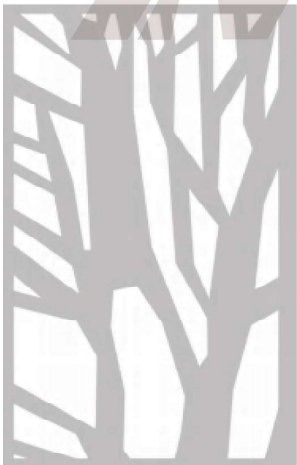

NA-41

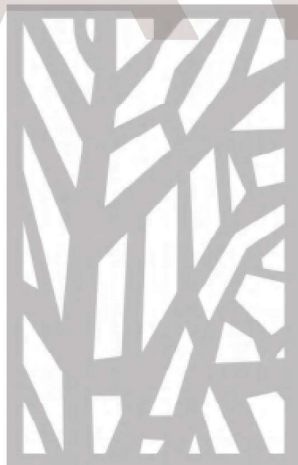


NA-42

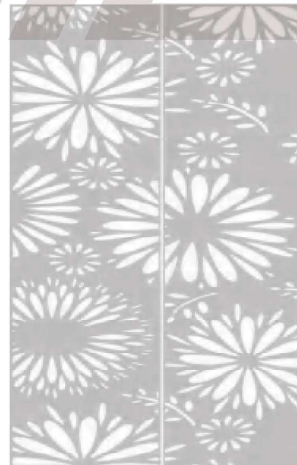


NA-43




NA-44

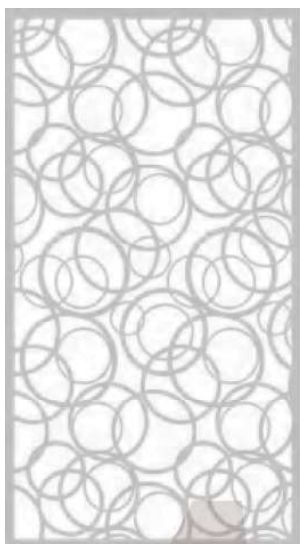


NA-01

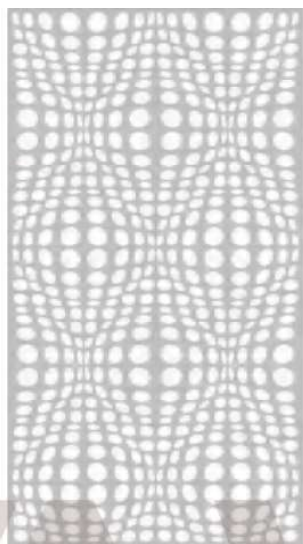

NA-02

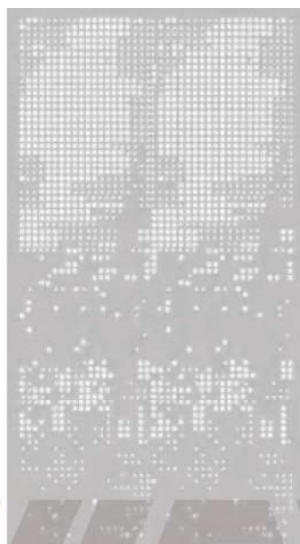


NA-03

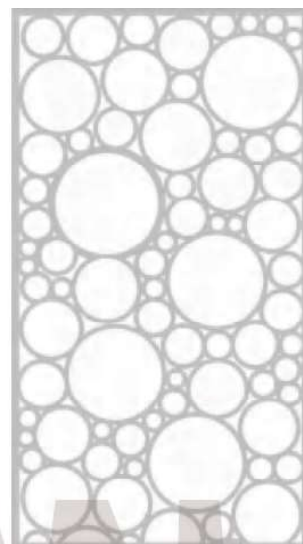

NA-04



NA-05

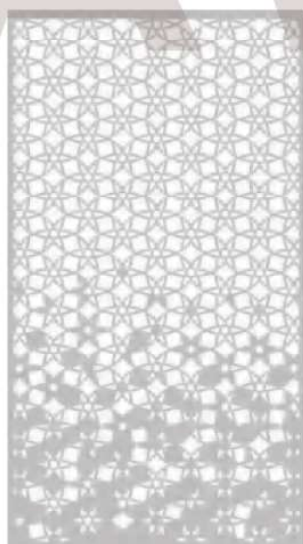


NA-06




NA-07



NA-08

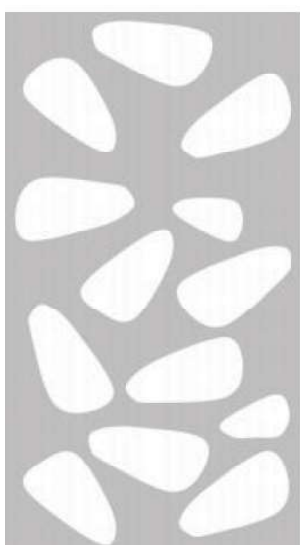


NA-09

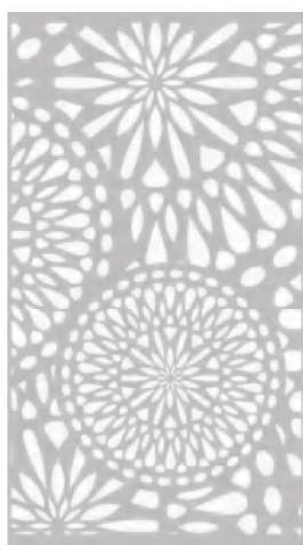


NA-10




NA-11

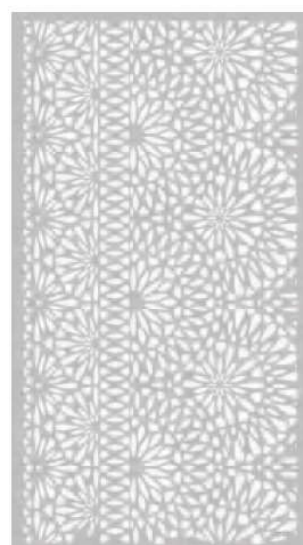


NA-12

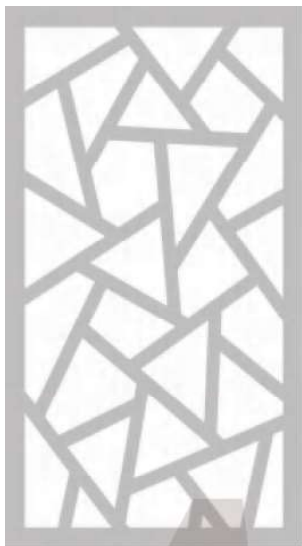


NA-25

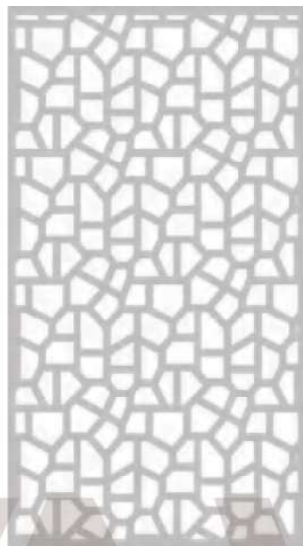

NA-26

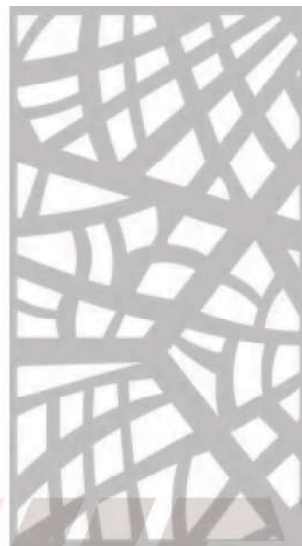

NA-27

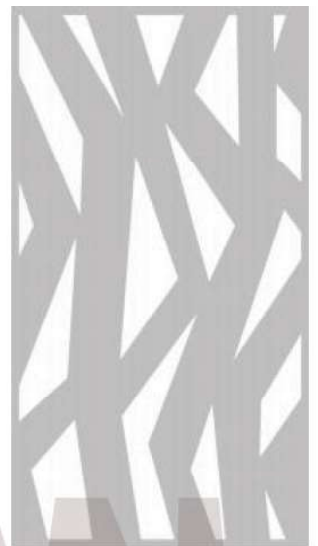

NA-28



NA-29



NA-30




NA-31



NA-32



NA-33

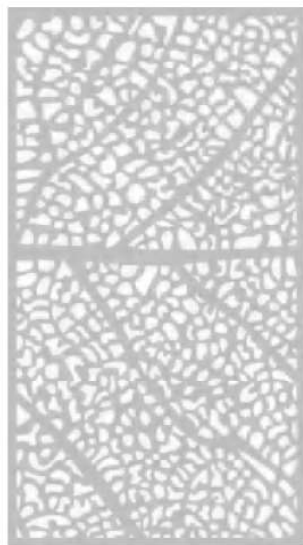

NA-34



NA-35



NA-36



NA-13




NA-14



NA-15



NA-16

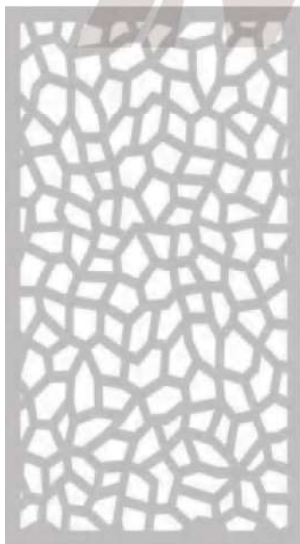

NA-17



NA-18



NA-19



NA-20



NA-21



NA-22



NA-23



NA-24



NA-45-1



NA-45-2



NA-46-1



NA-46-2




NA-47-1



NA-47-2



NA-48-1

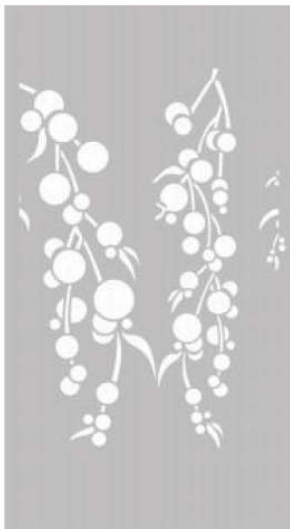


NA-48-2



NA-48-3



NA-49

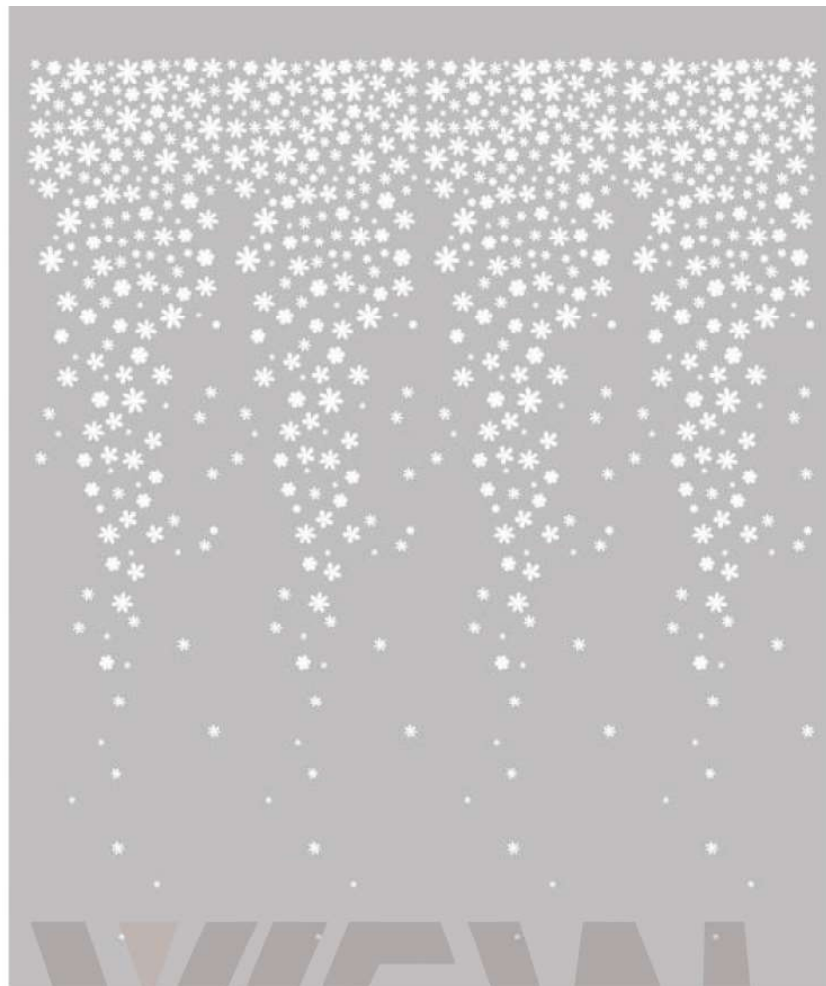


NA-50




NA-51




NA-52

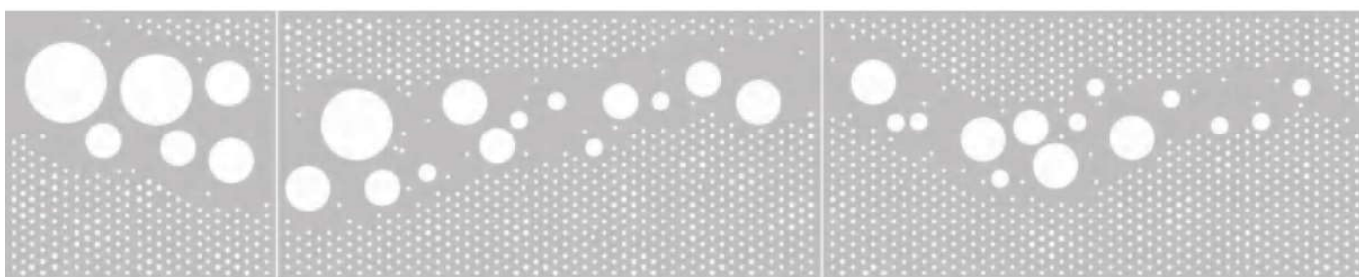

NA-53

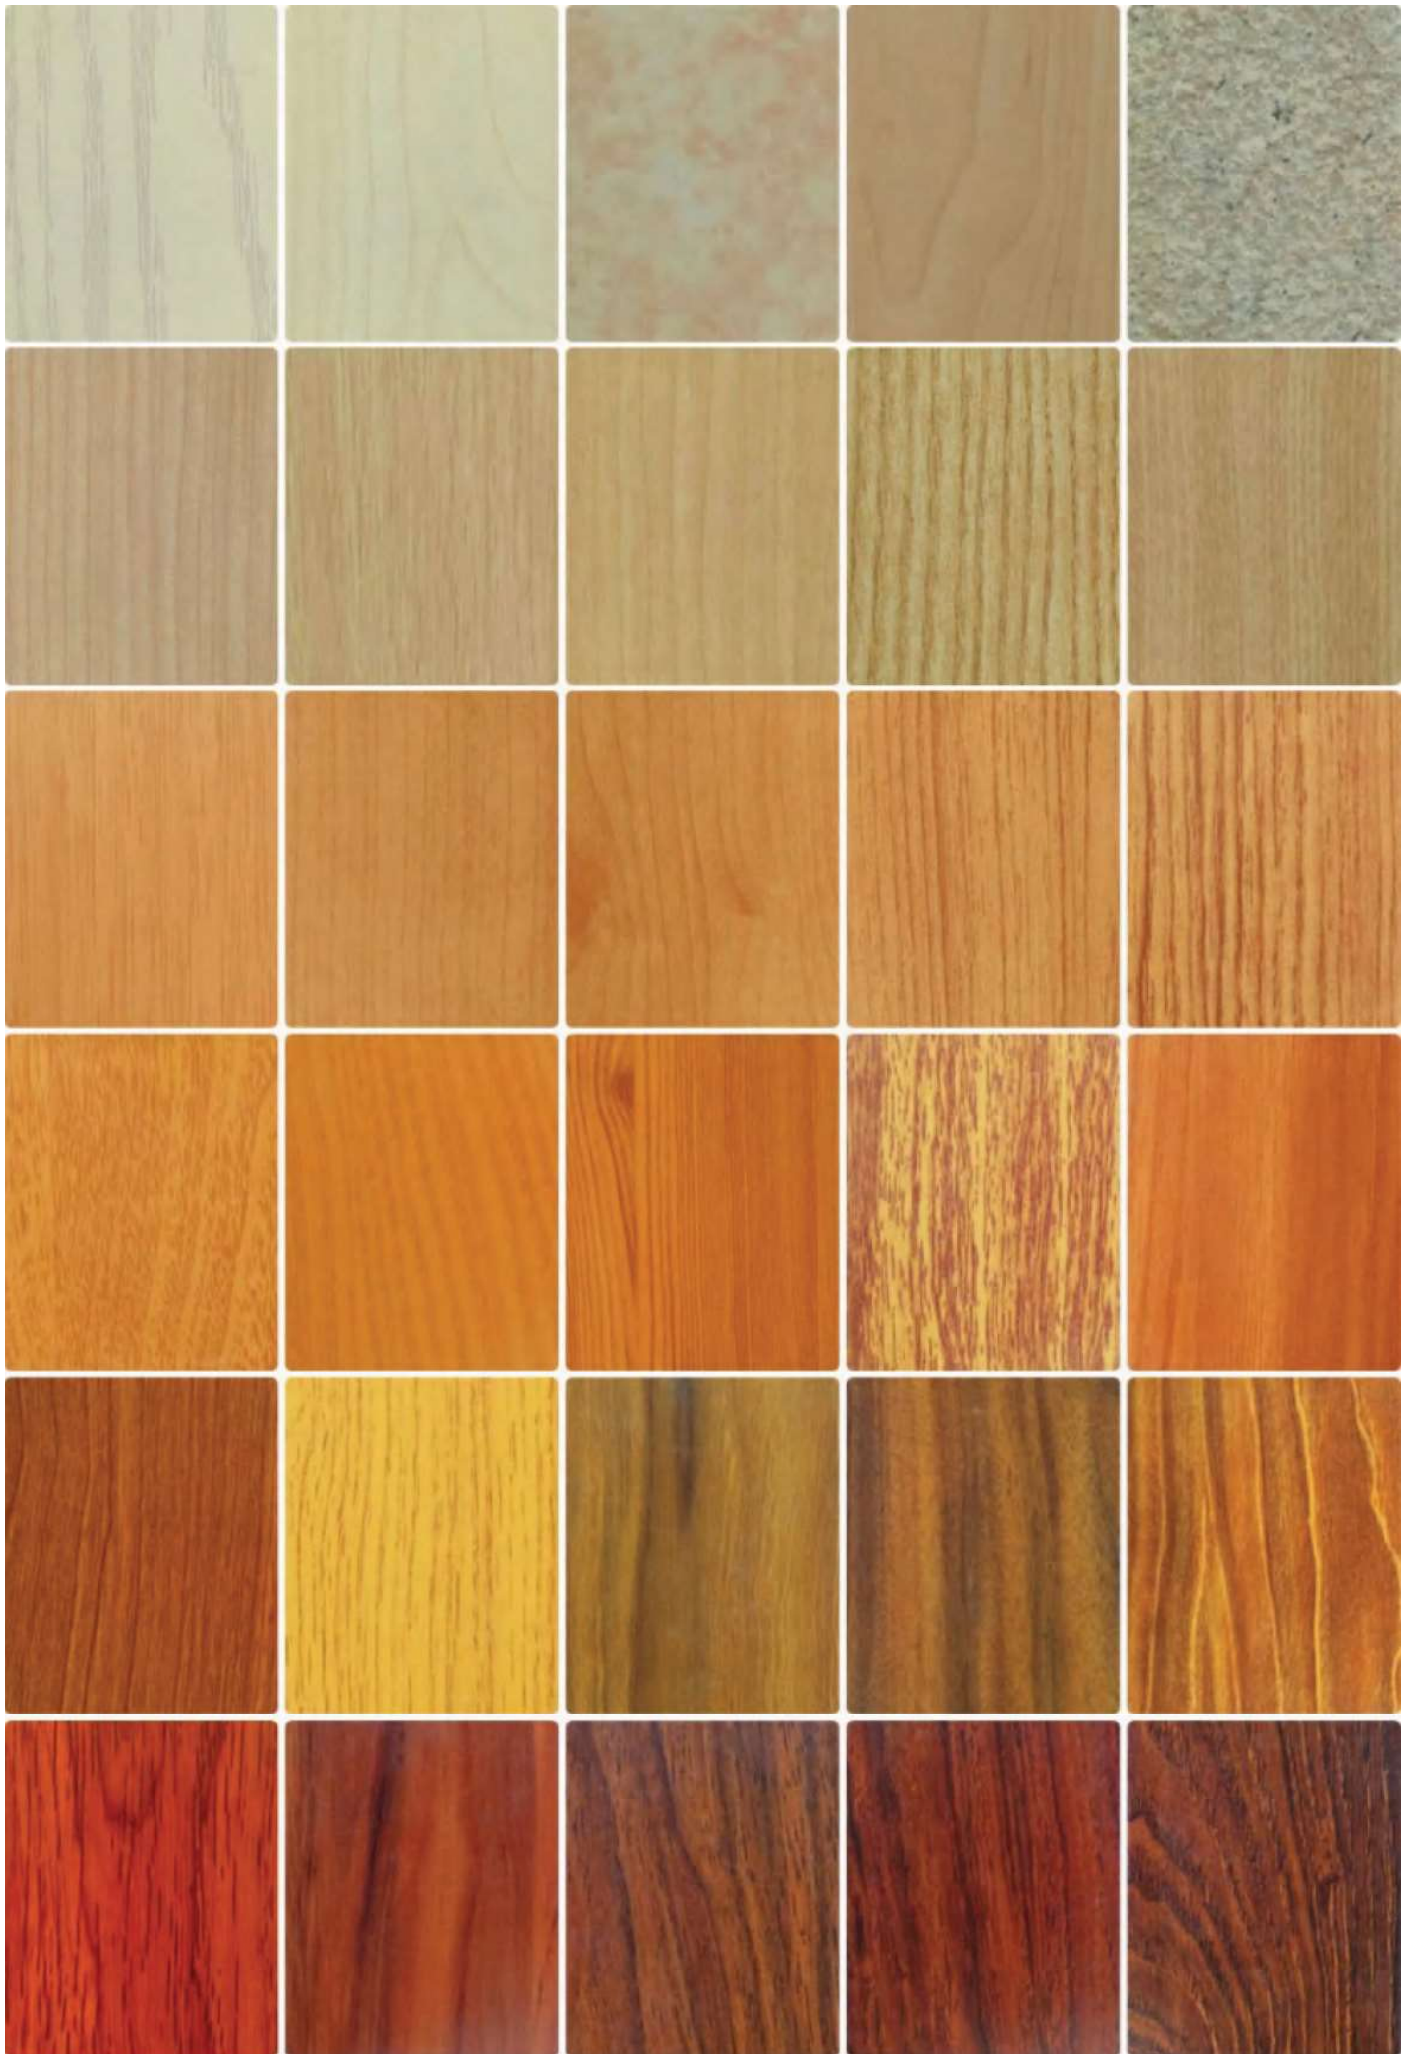







FOCUS
IS A "ATTITUDE"
INSISTED!

Wisdom and
meguiar's
space art


PERFORATED PATTERNS




NA-001
 ø 10 straight row spacing 20x20
 Opening rate of 19.6%
 Available thickness 1.5-2.0




NA-002
 ø 12 straight row spacing 24x24
 Opening rate of 19.6%
 Available thickness 1.5-2.0




NA-003
 ø 15 straight row spacing 30x30
 Opening rate of 19.6%
 Available thickness 1.0-2.5




NA-004
 ø 20 straight row spacing 40x40
 Opening rate of 19.6%
 Available thickness 1.5-2.5




NA-005
 ø 20 straight row spacing 60x60
 Opening rate of 8.7%
 Available thickness 1.5-2.5




NA-006
 ø 25 straight row spacing 36x36
 Opening rate of 37.8%
 Available thickness 1.5-3.0




NA-007
 ø 30 straight row spacing 50x50
 Opening rate of 28.2%
 Available thickness 1.5-3.0




NA-008
 ø 6 straight row spacing 12x12
 Opening rate of 19.6%
 Available thickness 1.5-2.0



NA-009
 ø 6 straight row spacing 15x15
 Opening rate of 12.5%
 Available thickness 1.5-2.0




NA-010
 ø 6 straight row spacing 16x16
 Opening rate of 11%
 Available thickness 1.5-2.0




NA-011
 ø 6 straight row spacing 16x16
 Opening rate of 22%
 Available thickness 1.5-2.0




NA-012
 ø 7 straight row spacing 50x25
 Opening rate of 3.3%
 Available thickness 0.8-1.5




NA-013
 ø 8 straight row spacing 15x15
 Opening rate of 22.3%
 Available thickness 1.5-2.5




NA-014
 ø 8 straight row spacing 16x16
 Opening rate of 19.6%
 Available thickness 1.5-2.5




NA-015
 ø 3 straight row spacing 6x6
 Opening rate of 11%
 Available thickness 0.8-2.5




NA-016
 ø 3 straight row spacing 6x6
 Opening rate of 19.6%
 Available thickness 0.8-2.5




NA-017
 ø 3 straight row spacing 5x5
 Opening rate of 23.3%
 Available thickness 0.8-1.5




NA-018
 ø 3 straight row spacing 12x12
 Opening rate of 4.9%
 Available thickness 0.8-2.0




NA-019
 ø 3 straight row spacing 15x7.5
 Opening rate of 6%
 Available thickness 0.8-1.5




NA-020
 ø 4 straight row spacing 8x8
 Opening rate of 19.6%
 Available thickness 0.8-2.0




NA-021
 ø 4 straight row spacing 10x10
 Opening rate of 12.5%
 Available thickness 0.8-2.5




NA-022
 ø 4 straight row spacing 10x5
 Opening rate of 25.1%
 Available thickness 0.8-2.0




NA-023
 ø 5 straight row spacing 10x10
 Opening rate of 19.6%
 Available thickness 0.8-3.0




NA-024
 ø 5 straight row spacing 15x15
 Opening rate of 8.7%
 Available thickness 1.5-3.0




NA-025
 ø 5 straight row spacing 16x16
 Opening rate of 7.8%
 Available thickness 1.5-3.0




NA-026
 ø 5 straight row spacing 16x8
 Opening rate of 15.3%
 Available thickness 1.5-2.5



NA-027
 ø 5 straight row spacing 20x10
 Opening rate of 9.8%
 Available thickness 1.5-2.5




NA-028
 ø 6 straight row spacing 10x10
 Opening rate of 28.2%
 Available thickness 0.8-1.5




NA-029
 ø 1.8 straight row spacing of 6x6
 Opening rate of 10.1%
 Available thickness 0.8-1.0




NA-030
 ø 1.8 straight row spacing 5x2.5
 Opening rate of 20%
 Available thickness 0.8-1.0




NA-031
 ø 2.3 straight row spacing 5x5
 Opening rate of 16.6%
 Available thickness 0.8-1.2




NA-032
 ø 2.3 straight row spacing 5x5
 Opening rate of 19.6%
 Available thickness 0.8-1.2




NA-033
 ø 2.3 straight row spacing 5.5x5.5
 Opening rate of 16.2%
 Available thickness 0.8-1.2




NA-034
 ø 3 straight row spacing 10x10
 Opening rate of 7%
 Available thickness 0.8-2.0




NA-035
 ø 3 straight row spacing 10x5
 Opening rate of 14%
 Available thickness 0.8-2.0




NA-036
 6x6 vertical spacing of 16x16 square hole
 Opening rate of 14%
 Available thickness 0.8-2.0




NA-037
 30x5 rounded hole
 Full hole spacing 40x15
 Opening rate of 22%
 Available thickness 0.8-2.0




NA-038
 40x5 rounded hole
 Full hole spacing 50x10
 Opening rate of 4%
 Available thickness 1.5-3.0




NA-039
 53x11 olive-shaped hole
 Full hole spacing 74x18
 Opening rate of 30%
 Available thickness 0.8-2.0




NA-040
 20x24 flower-shaped hole
 straight row spacing 25x30
 Opening rate of 25%
 Available thickness 1.5-3.0




NA-041
 21x4 28x9 rectangular hole
 straight row spacing
 Opening rate of 32%
 Available thickness 0.8-1.5




NA-042
 21x4 28x9 rectangular hole straight
 row spacing
 Opening rate of 16%
 Available thickness 0.8-1.5




NA-043
 Ling-shaped hole 15x15
 26x26 straight row spacing
 Opening rate of 49%
 Available thickness 0.8-2.0




NA-044
 4x4 full square hole straight row spacing
 Opening rate of 25%
 Available thickness 0.8-2.0




NA-045
 20x20 30x30 square hole
 Straight row spacing
 Opening rate of 44%
 Available thickness 1.5-3.0




NA-046
 8x8 square hole
 Straight row spacing 20x20
 Opening rate of 19%
 Available thickness 1.5-2.0



NA-047
 Outer diameter of 34 hexagonal hole
 Full hole spacing 104x32
 Opening rate of 19%
 Available thickness 1.5-3.0



NA-048
 40x5 rounded vertical hole
 spacing 50x10
 Opening rate of 8%
 Available thickness 1.5-3.0



NA-049
 ø 40 straight row spacing 70x35
 Opening rate of 28.2%
 Available thickness 1.5-3.0



ART HOLLOW ALUMINUM PLATE

Common thickness:

1.5mm, 2.0mm, 2.5mm, 3.0mm, 3.5mm




PRODUCT FEATURES

DECORATIVE METAL SHEET, is not only used for construction exterior wall decoration, but also popular in a lot of attractive metal decorations. Nowadays, it become good helper for designer or engineers.

We NAVIEW provide metal design choices for so many projects, flat, perforated, corrugated, honeycomb, etc. With more than 13-year professional metal fabrication produce experience, our factory has been able to overcome various difficulties, to ensure to present the best solution.

After you send us effect photos or drawing files, our designer and engineer team would make professional diagram and installation plan for you to confirm.

ART HOLLOW ALUMINUM PLATE PATTERN

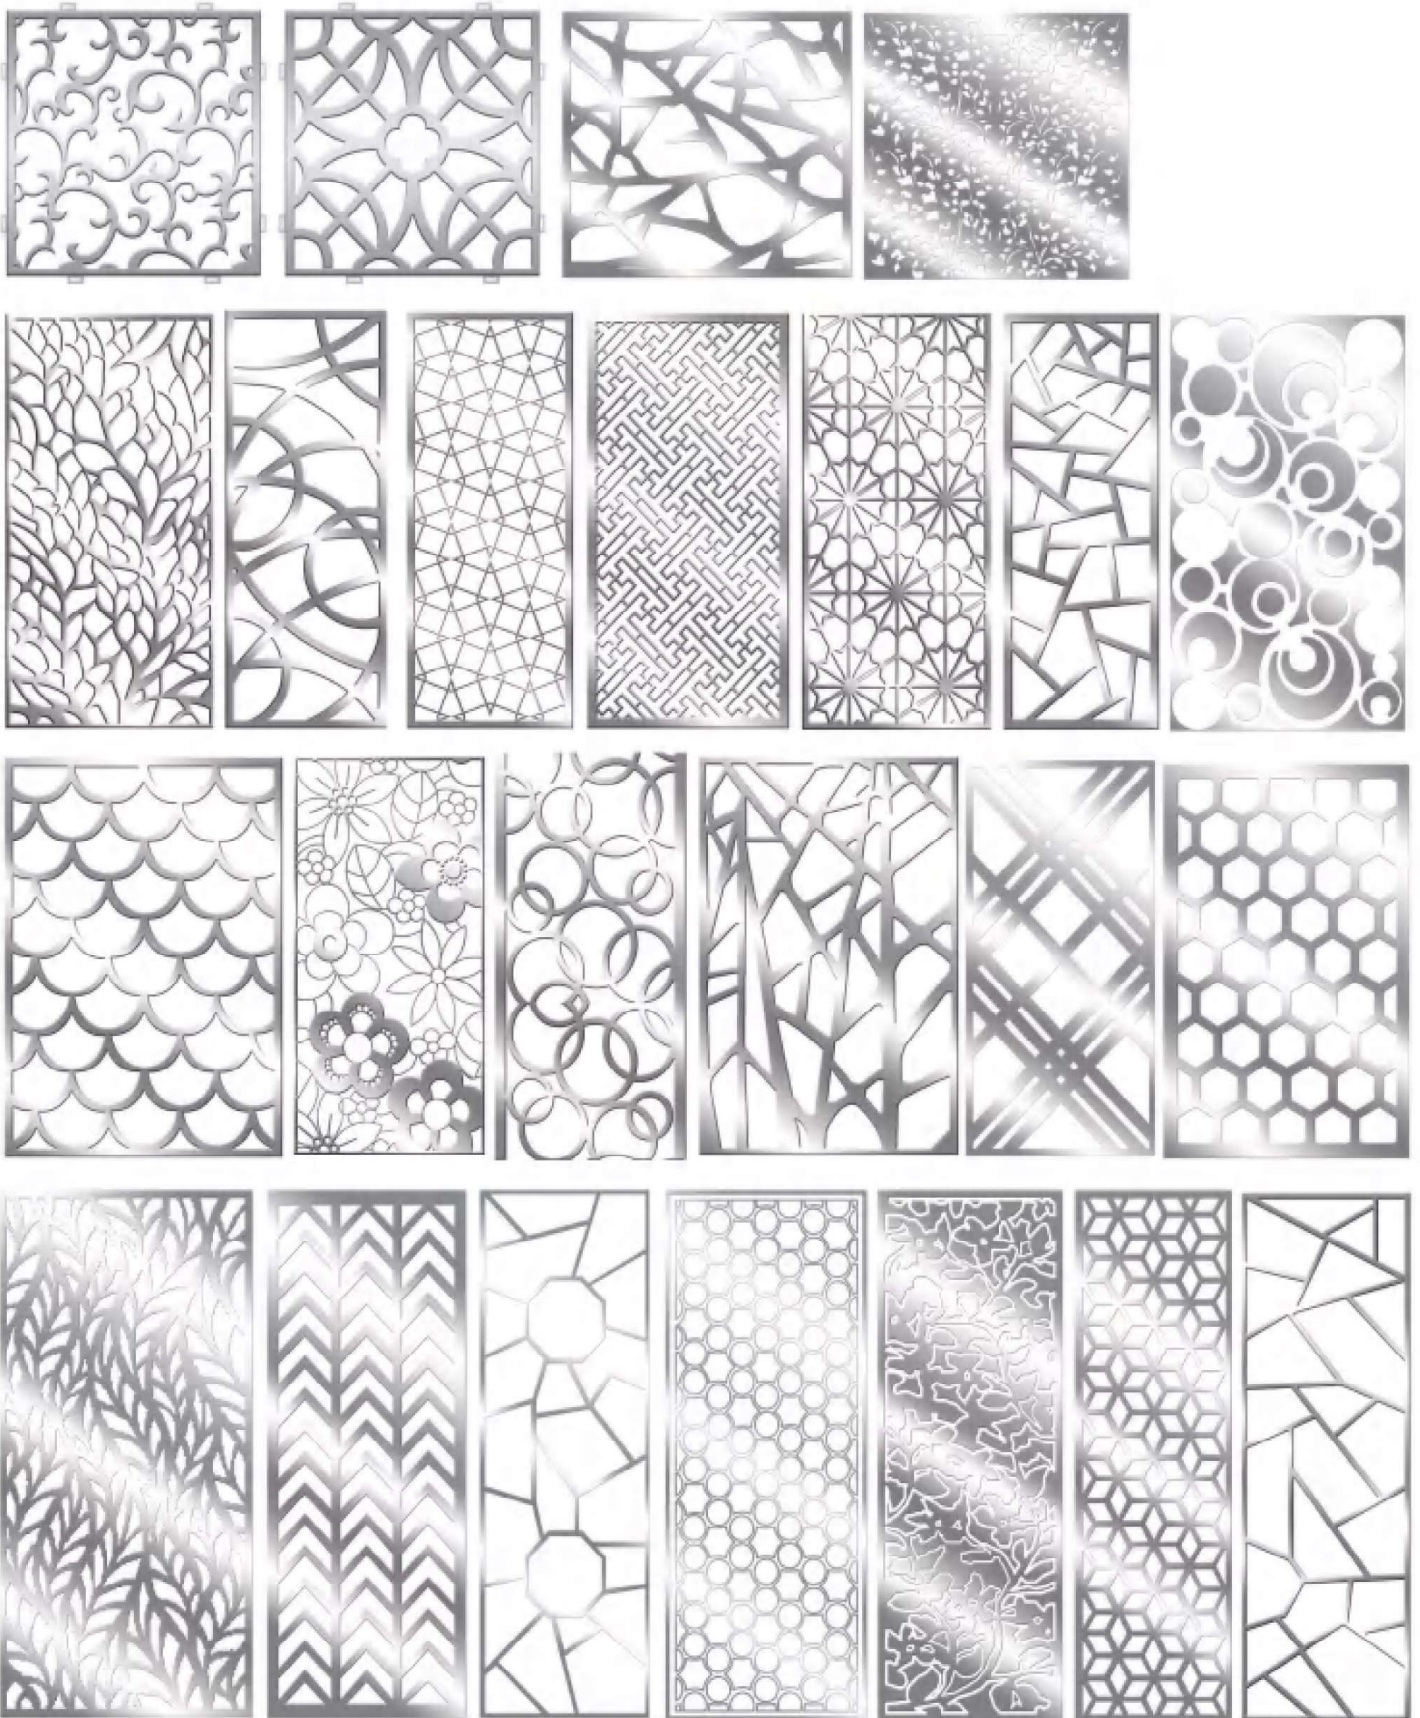

Note: 1. The color chart is for reference only. The products of the same model of different batches may have slight difference in color.

2. In selecting this product, the colors may be mixed according to the actual needs of project.



■ ALUMINUM VENEER SERIES

The selection of the degree of embossed space is generally to consider the overall theme, environmental location and other elements, so as to achieve a good visual effect, giving its emotional expression a serious, calm, honest and powerful momentum.



METAL SCREEN




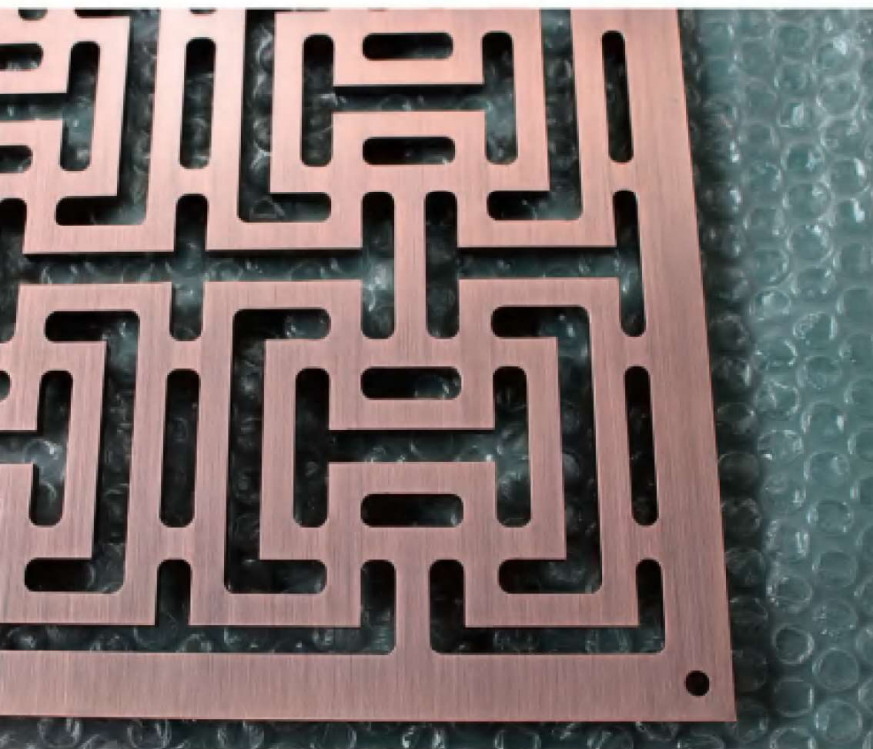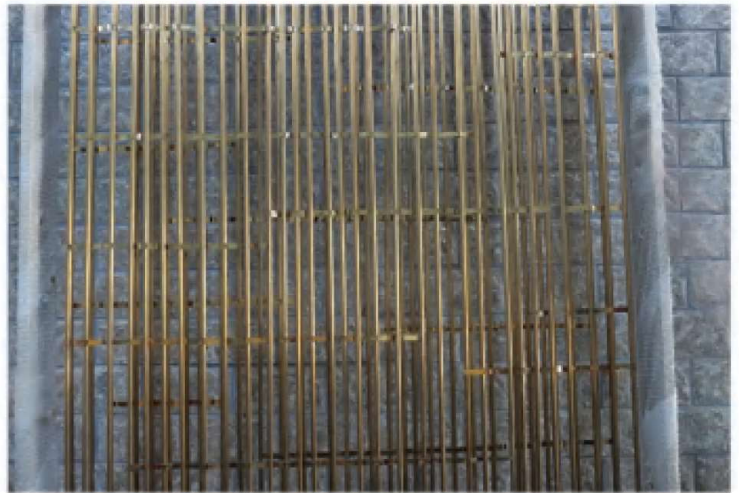

SPECIFICATION

- **Material :**
Aluminum Alloy/Stainless Steel
- **Finishes :**
PVDF coating/Electroplate/Wooden texture coating
- **Thickness :**
1.0 - 25 mm
- **Color :**
All RAL Color/Mill finished/Champagne gold/Rose gold, etc.
- **Packing:**
Waterproof Film/EPE/Wooden case



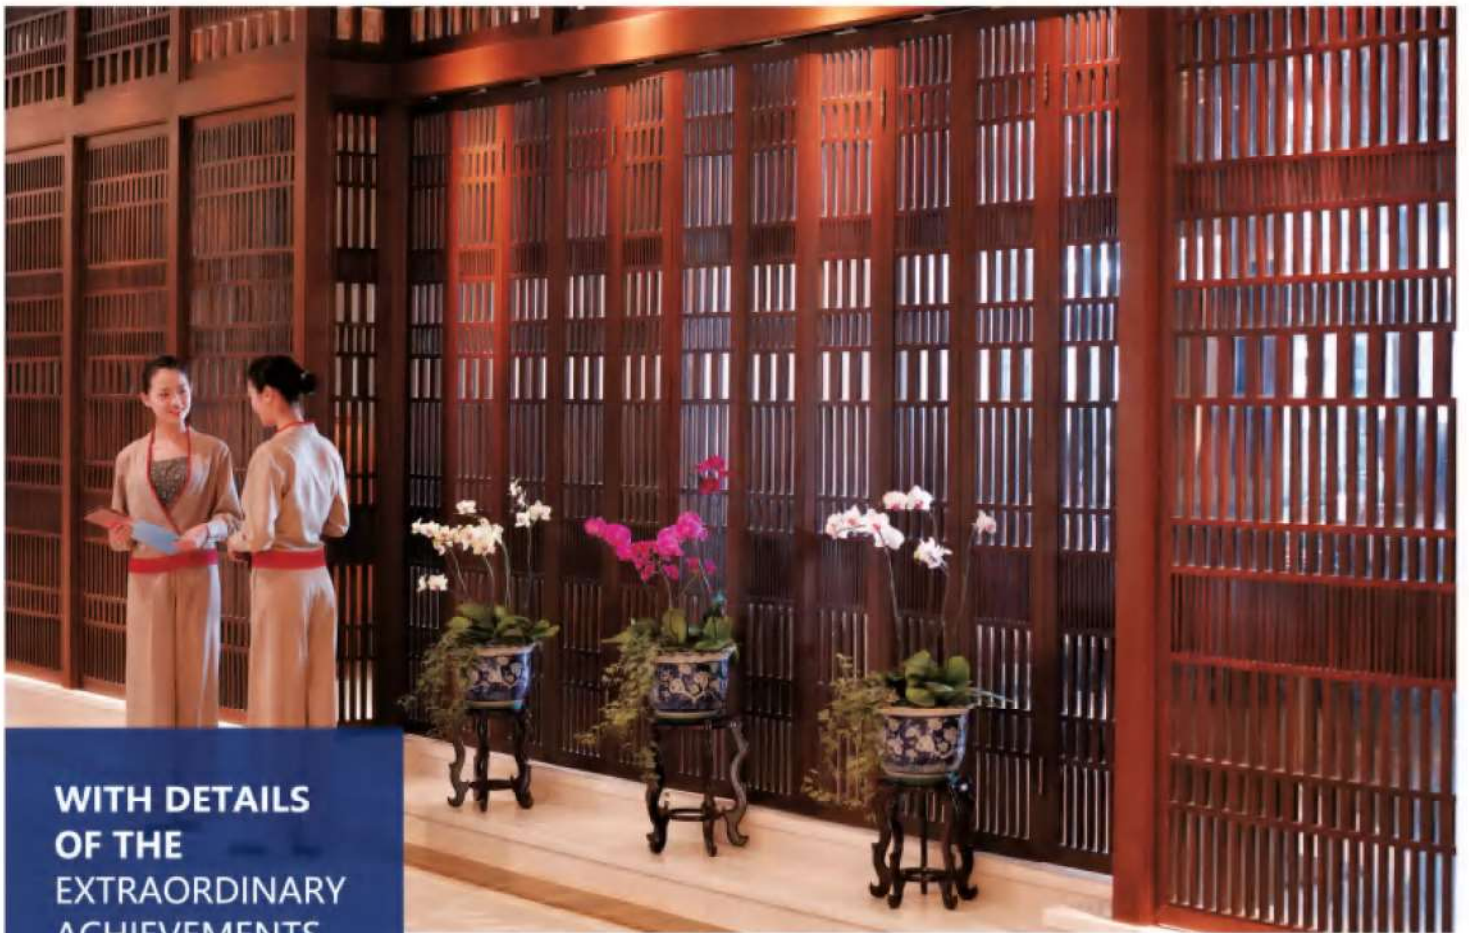


**WITH DETAILS
OF THE
EXTRAORDINARY
ACHIEVEMENTS**

Documenting the
civilization of
each era

Different styles, different shapes,
tailored carving board,
Perfect presentation of the designer's whimsy,
enjoy the beauty of architectural art.



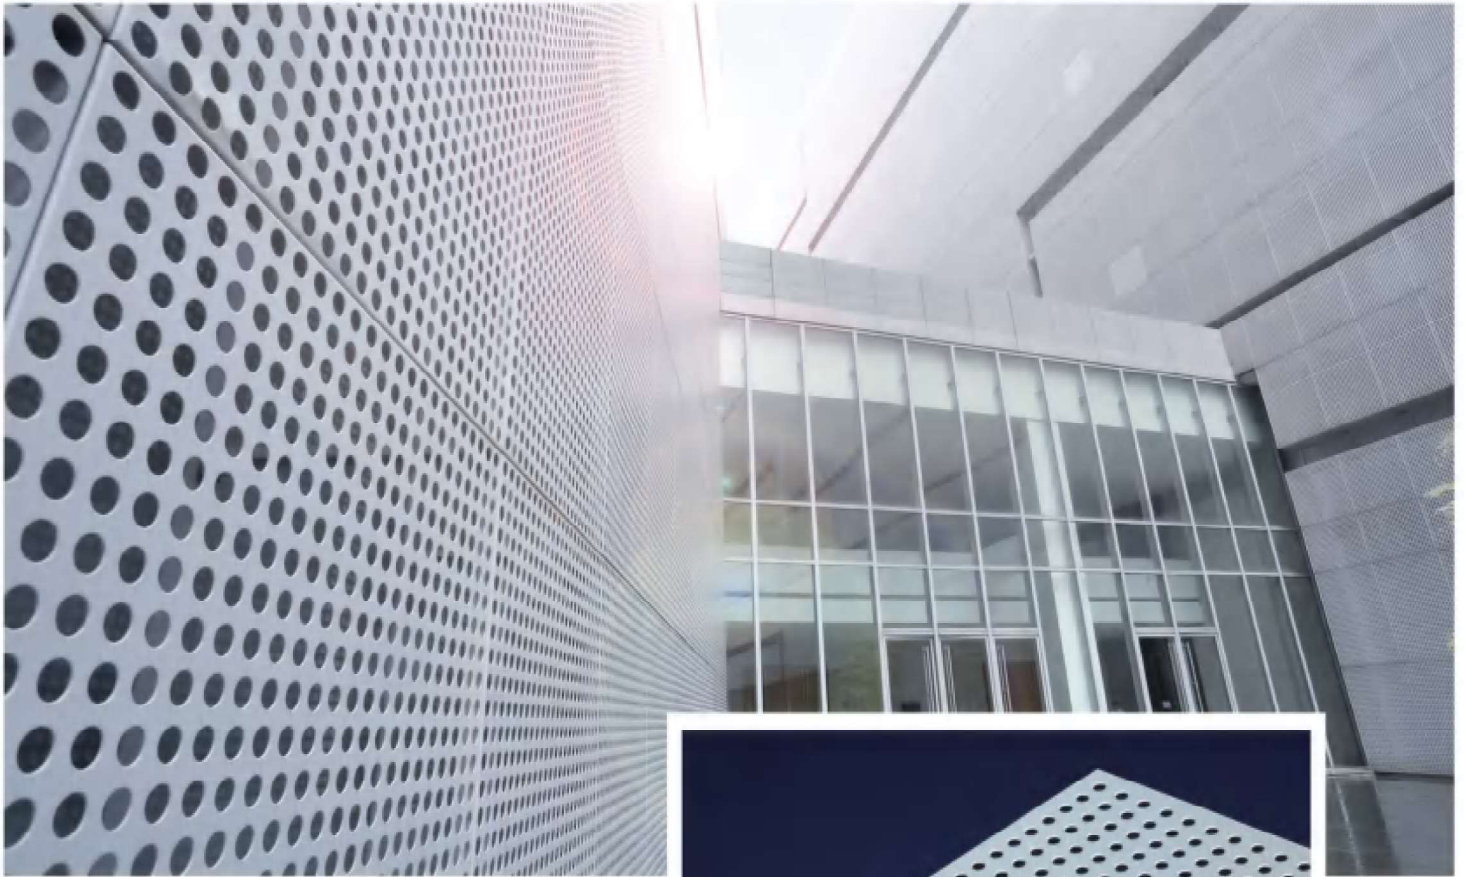

PUNCHING ALUMINUM VENEER



Conventional Aperture:

Φ 1.8- Φ 2.3, Φ 2.5- Φ 5.0, Φ 6.0- Φ 10, Φ 12- Φ 20,
 Φ 25- Φ 60, etc.

(See the more detailed parameters punching
specification table)

PRODUCT FEATURES

Perforated metal is one of the most popular metal products in construction fields nowadays. Round, slotted, square or other decorative perforations, could be punched by our CNC laser high technology punching machines. Accurate perforated sizes and sheet metal shapes are most important factors to ensure to install successfully.


The removed metal pieces would be recycled to metal recycle manage factory, to decrease the cost and be ecofriendly to environment.

Because perforated plate has so many interesting designs with openings, it has been installed on lots of construction applications, Stable and durable, such as partitions, facade wall cladding, ceiling, stairs, air conditioner covers, etc.




AN ARTISTIC JOURNEY THROUGH A PUNCH PANEL

Beautify the metal surface with a punching process of different specifications or flowers

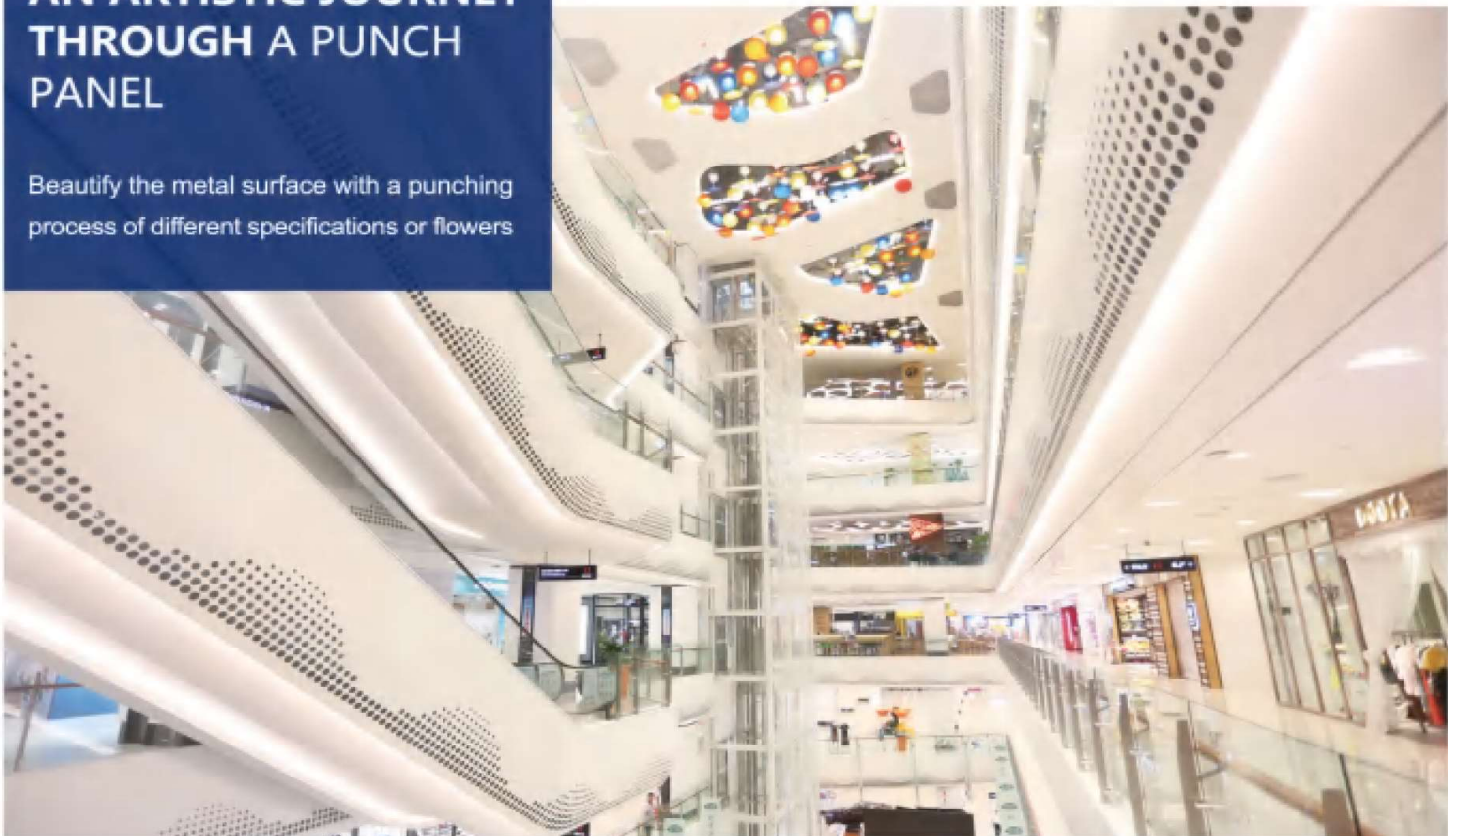




Grasp the classic context of art, the inspirational description within the coordinates, the scent of the scent of the dust, and the beauty. Aesthetic space, abandoning the cumbersome urban life, and fulfilling the yearning for beauty in the private field.

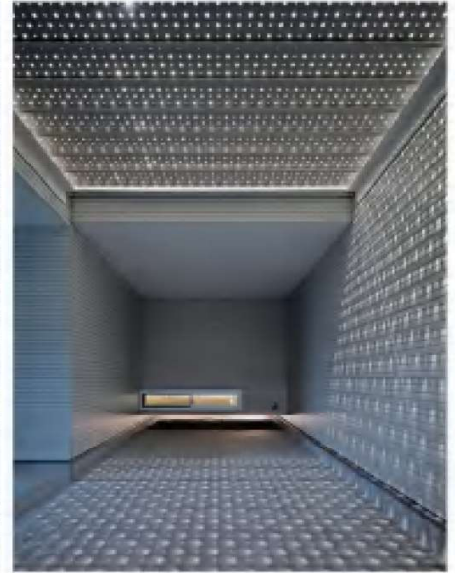

ALUMINUM VENEER PROJECT



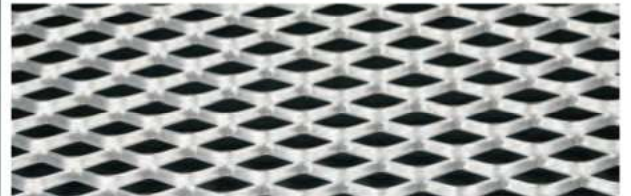

STRETCHING MESH

PANEL/

- Decorate the space
- Good quality aluminum alloy
- Easy for install different kinds of lighting
- Warranty:10 years
- Easy for install the ventilation and fire sprinkler equipment
- Can be connect with the frame system
- Can be reuse in many times



WY-001



WY-002



WY-003




WY-004



WY-005




WY-006

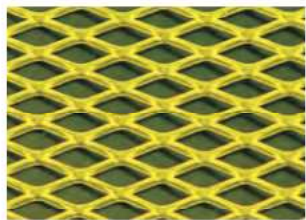

WY-007




WY-008

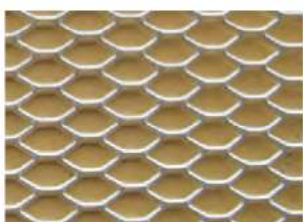


WY-009



WY-010

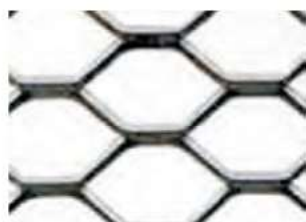

WY-011

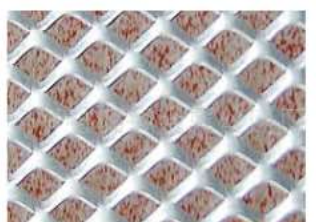

WY-012




Room 306 Zone 027, Madrigal Building,
286 Escolta St, Binondo, Manila,
1006 Metro Manila

sales@ariesimextrading.com

www.ariesimextrading.com

09953884201 • 09167043556 • 82871988

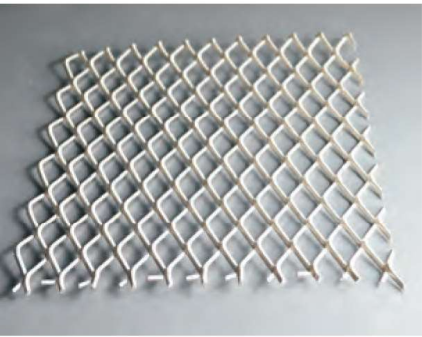



Aries Imex Trading Inc.



ariesimexmarketing2022



09219102697



www.ariesimextrading.com



sales@ariesimextrading.com



09953884201 • 09167043556



Room 306 Zone 027, Madrigal Building,
286 Escolta St, Binondo, Manila,
1006 Metro Manila